

DS-QAE0606G2-V
Analog Frameless Ceiling Speaker 6W



- 6" paper basin+High note
- Rated Power: 3/6 W
- Sensitivity(1 m, 1 W): 93 dB \pm 3 dB
- Max. SPL: 104 dB
- Frequency Response: 90 Hz to 20 kHz
- White


▪ Specification

Speaker	
Impedance	8 Ω
Speaker Unit	6" paper basin+High note
Rated Power	100V: 6W/3W
Sensitivity(1 m, 1 W)	93dB \pm 3dB
Maximum Sound Pressure Level	104dB
Frequency Response	90Hz to 20kHz
Interface	
Audio In	Rated voltage , 100 V
General	
Material	Main body: PC Base: ABS
Dimension	\varnothing 188mm X 75mm (7.40"×2.95")
Package Dimension	190mmx190mmx78mm(7.48" × 7.48" × 3.07")
Weight	Approx.657 g (1.45 lb.)
With Package Weight	Approx.834 g (1.83 lb.)
Packing List	Device × 1 Quick Start Guidex1
Operating Temperature	-10 °C to 45 °C
Operating Humidity	< 90% (No condensation)
Mounting Hole Dimension	\varnothing 170mm

▪ Available Model

DS-QAE0606G2-V

▪ Dimension

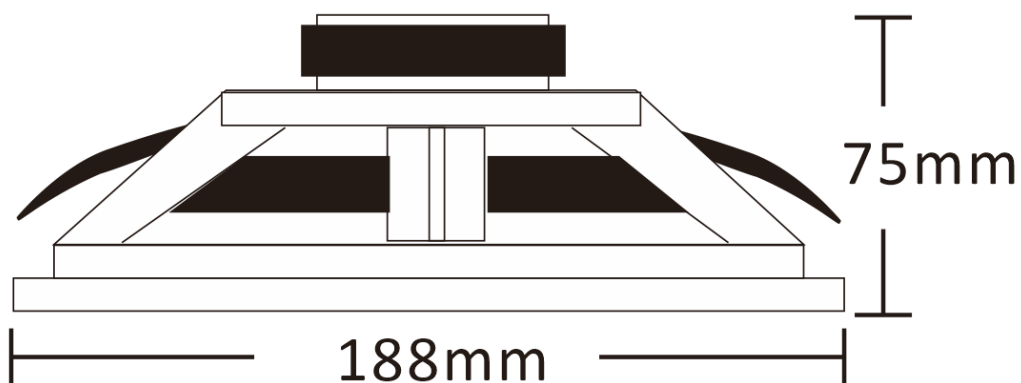

See Far, Go Further



www.hikvision.com
support@hikvision.com

