

## DS-D5022QE-D 21.5 inch FHD Borderless Monitor




- Ultra-thin device body with ultra-thin border for 3 sides.
- 8 bit LVDS HD (1920 × 1080) display.
- 178° ultra-wide view screen.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Supports VESA wall mount.

## ▪ Specification

Model		DS-D5022QE-D
<b>Display</b>	Screen Size	21.5 inch
	Active Display Area	478.656 mm × 260.280 mm
	Resolution	1920 × 1080@60 Hz
	Backlight	E-LED
	Pixel Pitch	0.0831 mm (H) × 0.241 mm (V)
	Brightness	250 cd/m <sup>2</sup>
	Viewing Angle	178° (H) / 178° (V)
	Color Depth	8 bit
	Contrast Ratio	3000 : 1
	Response Time	6.5 ms
	Refresh Rate	60 Hz
	Haze	Haze 25%, 3H
	Color Gamut	72% NTSC
	<b>Interface</b>	Video & Audio Input
Video & Audio Output		None
Data Transmission Interface		None
Control Interface		None
<b>Power</b>	Power Supply	DC 12V, 2.0A
	Power Consumption	≤ 24 W
	Standby Consumption	≤ 0.5 W
<b>Working Environment</b>	Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Working Humidity	10% to 90% RH (Non-Condensing)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Storage Humidity	0% to 90% RH
<b>General</b>	Casing Material	Plastic
	VESA	75 mm × 75 mm (4 - M4 × 6 mm)
	Bezel Width	6.85 mm (top/left/right), 21.55 mm (bottom)
	Product Dimensions (W × H × D)	492.4 mm × 390.1 mm × 200.2 mm (19.4 × 15.4 × 7.9 inch)
	Package Dimensions (W × H × D)	599 mm × 393 mm × 109 mm (23.6 × 15.5 × 4.3 inch)
	Net Weight	2.08 ± 0.5 kg (4.6 ± 1.1 lb.)
	Gross Weight	3.4 ± 0.5 kg (7.5 ± 1.1 lb.)
	Packing List	Monitor × 1, Base component × 1, Power adapter (12 V, 2.0 A) × 1, HDMI cable (1.5 m) × 1
	Remarks	If the appearance and parameters in this specification vary from the actual product, the later prevails. You can also consult local sale staff.

## Physical Interface


Interface	Description	Interface	Description
HDMI	HDMI 1.4 digital signal input interface	VGA	VGA analog signal input interface
DC	DC 12V , 2.0 A		



## Available Model

DS-D5022QE-D

## Dimension

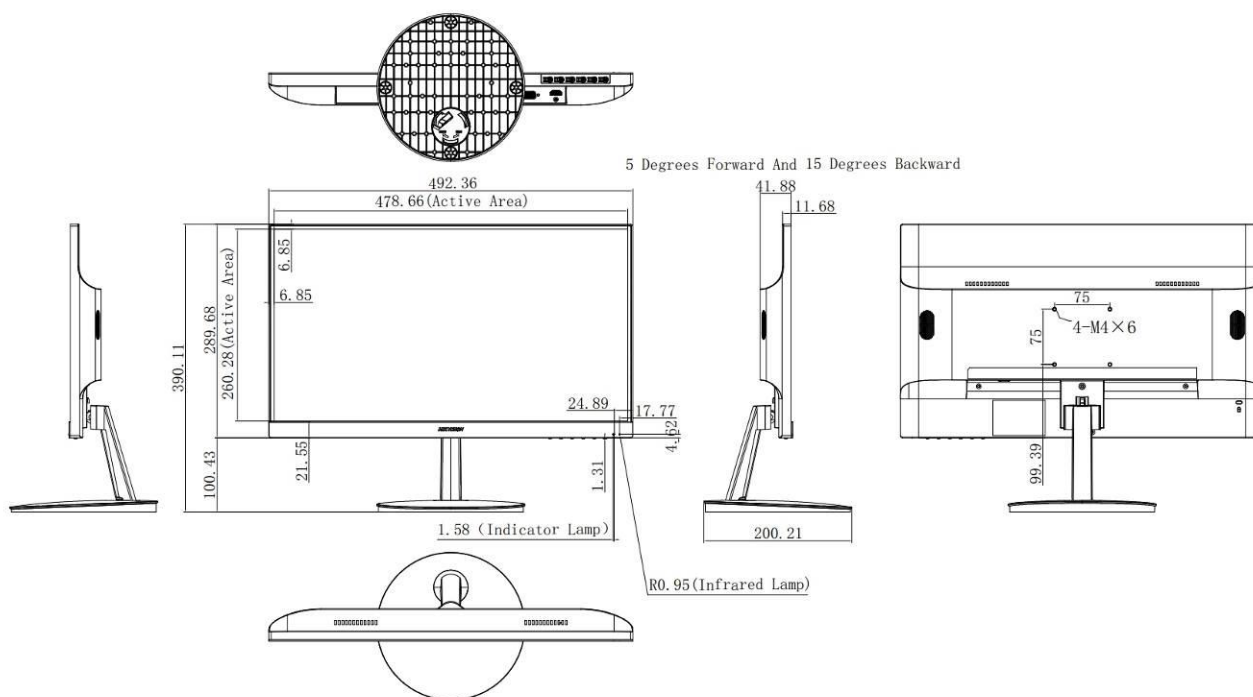

Unit: mm

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq

